

|      |                  |
|------|------------------|
| No.  | <b>LCP-05006</b> |
| DATE | Apr.28.2005      |

TECHNICAL LITERATURE

FOR

**CG-Silicon TFT-LCD module**

MODEL No. **LS037V7DW01**

## TENTATIVE

The technical literature is subject to change without notice.  
So, please contact Sharp or its representative before designing  
your product based on this literature.

Engineering Department V  
MOBILE LCD DESIGN CENTER I  
MOBILE LIQUID CRYSTAL DISPLAY GROUP  
SHARP CORPORATION

## RECORDS OF REVISION

MODEL No : LS037V7DW01

SPEC No : LCP-05006

[illegible]

## NOTICE

This publication is the proprietary of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.

The application circuit examples in this publication are provided to explain the representative applications of SHARP's devices and are not intended to guarantee any circuit design or permit any industrial property right or other rights to be executed. SHARP takes no responsibility for any problems related to any industrial property right or a third party resulting from the use of SHARP's devices, except for those resulting directly from device manufacturing processes.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP's device.

SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact SHARP in order to obtain the latest specification sheets before using any SHARP's device. Manufacturing locations are also subject to change without notice.

Observe the following points when using any device in this publication. SHARP takes no responsibility for damage caused by improper use of the devices.

The devices in this publication are designed for use in general electronic equipment designs, such as:

- Personal computers      • Office automation      • Telecommunication equipment
- Test and measurement equipment      • Industrial control
- Audio visual and multimedia equipment      • Consumer electronics

The appropriate design measures should be taken to ensure reliability and safety when SHARP's devices are used for equipment such as:

- Transportation control and safety equipment(i.e., aircraft, trains, automobiles, etc.)
- Traffic signals      • Gas leakage sensor breakers
- Alarm equipment      • Various safety devices etc.

SHARP's devices shall not be used for equipment that requires extremely high level of reliability, such as:

- Military and space applications      • Nuclear power control equipment
- Medical equipment for life support

Contact a SHARP representative, in advance, when intending to use SHARP's devices for any "specific" applications other than those recommended by SHARP.

Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

## (1) Application

This literature applies to LS037V7DW01.

## (2) Overview

This module is a color transfective and active matrix LCD module incorporating CG-Silicon TFT (Continuous Grain-Silicon Thin Film Transistor). It is composed of a color TFT-LCD panel, driver ICs(with control Function), an FPC(with DC-DC Converter), a back light, a touch panel and a back sealed casing. It is composed control circuit. Graphics and texts can be displayed on a  $480 \times 3 \times 640$  dots panel with 262,144 colors by supplying.

This LCD module has multi resolution and multi colors functions. A resolution mode is selective in VGA ( $480H \times 640V$ ) or QVGA ( $240H \times 320V$ ). A Color mode is selective in 262,144 colors (18bit RGB) or 8 colors (3bit RGB).

It is a wide viewing-angle-mode (Vertical viewing angle:  $(\pm 80^\circ)$  Horizontal viewing angle:  $(\pm 80^\circ)$ ,  $CR \geq 5$ ).

## (3) Mechanical specifications


Table 1

| Parameter               | Specifications                                   | Units  | Remarks   |
|-------------------------|--------------------------------------------------|--------|-----------|
| Screen size (Diagonal)  | 9.4 [3.7" ] Diagonal                             | cm     |           |
| Display active area     | 56.16 (H) $\times$ 74.88 (V)                     | mm     |           |
| Touch panel active area | 57.4 (H) $\times$ 76.1 (V)                       | mm     |           |
| Pixel format            | 480(H) $\times$ 640(V)<br>(1 pixel = R+G+B dots) | pixels |           |
| Dot pitch               | 0.039 (H) $\times$ 0.117 (V)                     | mm     |           |
| Pixel configuration     | R,G,B vertical stripe                            |        |           |
| Unit outline dimension  | 65.0(W) $\times$ 89.2(H) $\times$ 4.4(D)         | mm     | 【Note3-1】 |
| Mass                    | (TBD)                                            | g      |           |
| Surface hardness        | (3H)                                             |        |           |

【Note 3-1】

Excluding protrusion. For detailed measurements and tolerances, please refer to Fig. 1.

## (4) Pixel configuration

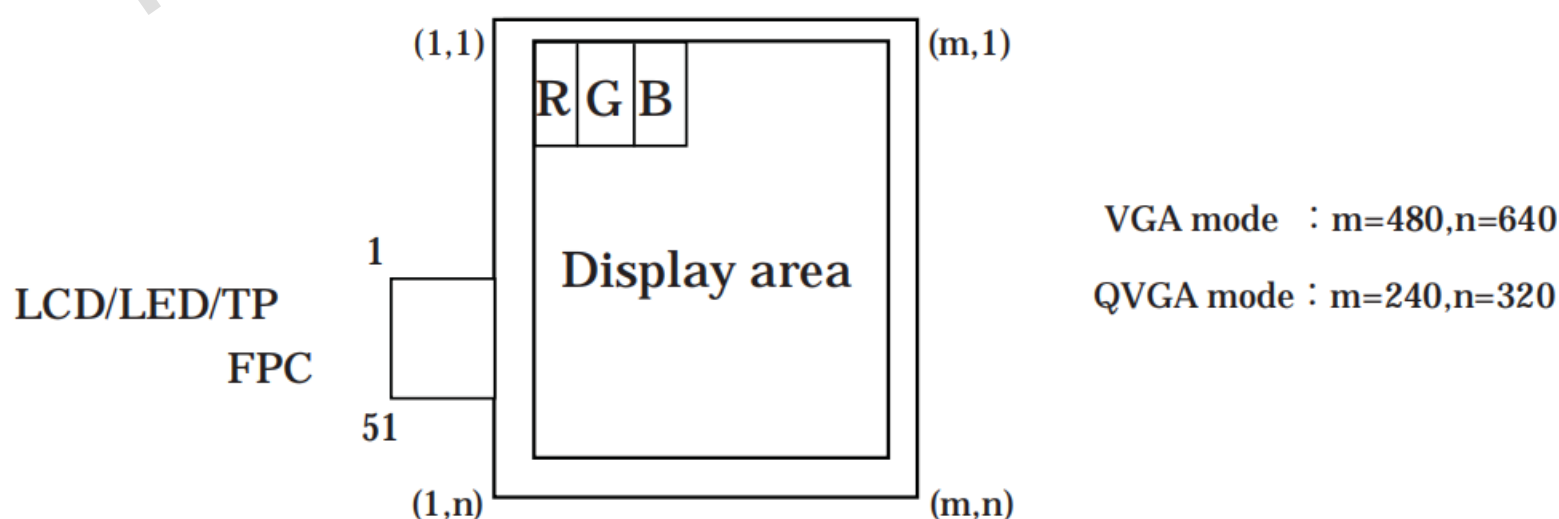

## (5) Input/Output terminal

## 5-1) TFT-LCD panel and Backlight driving section

Table2

| Pin No. | Symbol | I/O | Description                                  | Remarks   |
|---------|--------|-----|----------------------------------------------|-----------|
| 1       | LED+   | —   | LED power supply(High Voltage)               |           |
| 2       | NC     | —   |                                              |           |
| 3       | LED-   | —   | LED power supply(Low Voltage)                |           |
| 4       | N C    | —   |                                              |           |
| 5       | T4     | —   | Touch panel lower electrode(Right side)      |           |
| 6       | T3     | —   | Touch panel upper electrode(6 o'clock side)  |           |
| 7       | T2     | —   | Touch panel lower electrode(Left side)       |           |
| 8       | T1     | —   | Touch panel upper electrode(12 o'clock side) |           |
| 9       | GND    | —   | Ground                                       |           |
| 10      | RESB   | I   | Reset signal                                 | 【Note5-1】 |
| 11      | GND    | —   | Ground                                       |           |
| 12      | MO     | I   | Selection for resolution(VGA/QVGA)           | 【Note5-2】 |
| 13      | UD     | I   | Selection for vertical scanning direction    | 【Note5-3】 |
| 14      | LR     | I   | Selection for horizontal scanning direction  | 【Note5-4】 |
| 15      | INI    | I   | Power on control                             | 【Note5-1】 |
| 16      | DEN    | I   | Data enable signal                           | 【Note5-5】 |
| 17      | GND    | —   | Ground                                       |           |
| 18      | VSYNC  | I   | Vertical synchronizing signal                |           |
| 19      | GND    | —   | Ground                                       |           |
| 20      | HSYNC  | I   | Horizontal synchronizing signal              |           |
| 21      | GND    | —   | Ground                                       |           |
| 22      | CLKIN  | I   | System clock signal                          |           |
| 23      | GND    | —   | Ground                                       |           |
| 24      | VCC    | —   | Power supply(3.3V)                           | 【Note5-1】 |
| 25      | VCC    | —   | Power supply(3.3V)                           | 【Note5-1】 |
| 26      | VCC    | —   | Power supply(3.3V)                           | 【Note5-1】 |
| 27      | GND    | —   | Ground                                       |           |
| 28      | B5     | I   | Blue data signal(MSB)                        |           |
| 29      | B4     | I   | Blue data signal                             |           |
| 30      | B3     | I   | Blue data signal                             |           |
| 31      | B2     | I   | Blue data signal                             |           |
| 32      | B1     | I   | Blue data signal                             |           |
| 33      | B0     | I   | Blue data signal(LSB)                        |           |
| 34      | GND    | —   | Ground                                       |           |
| 35      | G5     | I   | Green data signal(MSB)                       |           |
| 36      | G4     | I   | Green data signal                            |           |

| Pin No. | Symbol | I/O | Description            | Remarks |
|---------|--------|-----|------------------------|---------|
| 37      | G3     | I   | Green data signal      |         |
| 38      | G2     | I   | Green data signal      |         |
| 39      | G1     | I   | Green data signal      |         |
| 40      | G0     | I   | Green data signal(LSB) |         |
| 41      | GND    | —   | Ground                 |         |
| 42      | R5     | I   | Red data signal(MSB)   |         |
| 43      | R4     | I   | Red data signal        |         |
| 44      | R3     | I   | Red data signal        |         |
| 45      | R2     | I   | Red data signal        |         |
| 46      | R1     | I   | Red data signal        |         |
| 47      | R0     | I   | Red data signal(LSB)   |         |
| 48      | GND    | —   | Ground                 |         |
| 49      | ID1    | —   | Ground                 |         |
| 50      | ID2    | —   | Ground                 |         |
| 51      | ID3    | —   | Ground                 |         |

【Note5-1】 See section(7-1)-(A) "※Cautions when you turn on or off the power supply".

【Note5-2】 Selection for resolution mode

| MO   | Resolution |
|------|------------|
| Low  | VGA        |
| High | QVGA       |

【Note5-3】 Selection for vertical scanning direction

| U/L  | Scanning direction (Pixel configuration)          |
|------|---------------------------------------------------|
| High | Conventional scanning ( X , 1 )<br>↓<br>( X , Y ) |
| Low  | Inverted scanning ( X , 1 )<br>↑<br>( X , Y )     |

VGA mode: Y=640, QVGA mode: Y=320

【Note5-4】 Selection for horizontal scanning direction

| LBR  | Scanning direction (Pixel configuration) |
|------|------------------------------------------|
| High | Conventional scanning (1,Y) → (X,Y)      |
| Low  | Inverted scanning (1,Y) ← (X,Y)          |

VGA mode: X=480, QVGA mode: X=240

【Note5-5】

DEN makes it possible to take effective data timing. Horizontal Data Sampling Timing is shown in 7-2) Timing Characteristics of input signals.

## (6)Absolute Maximum Ratings


Table 3

| Parameter                            | Symbol           | Condition | Ratings       | Unit | Remark     |
|--------------------------------------|------------------|-----------|---------------|------|------------|
| Power supply (COG driver / Digital)  | VSHD             | Ta=25℃    | -0.3~+4.0     | V    |            |
| Input voltage (Digital)              | VID              | Ta=25℃    | -0.3~VSHD+0.3 | V    | [Terminal] |
| Operating temperature(Panel surface) | T <sub>opp</sub> | —         | -10~60        | ℃    | 【Note6-1】  |
| Storage temperature                  | T <sub>stg</sub> | —         | -20~70        | ℃    | 【Note6-1】  |
| LED current                          | I <sub>L</sub>   | Ta=25℃    | (20)          | mA   | 【Note6-2】  |

[Terminal] INI, VSYNC, HSYNC, MO, UD, LR, CLK, R0~R5, G0~G5, B0~B5, DEN, RESB

【Note6-1】 Humidity: 95%RH Max.(at Ta ≤ 40℃). Maximum wet-bulb temperature is less than 39℃ (at Ta > 40℃). Condensation of dew must be avoided.

【Note6-2】 (Provisional plan) LED current should be as per below figure.

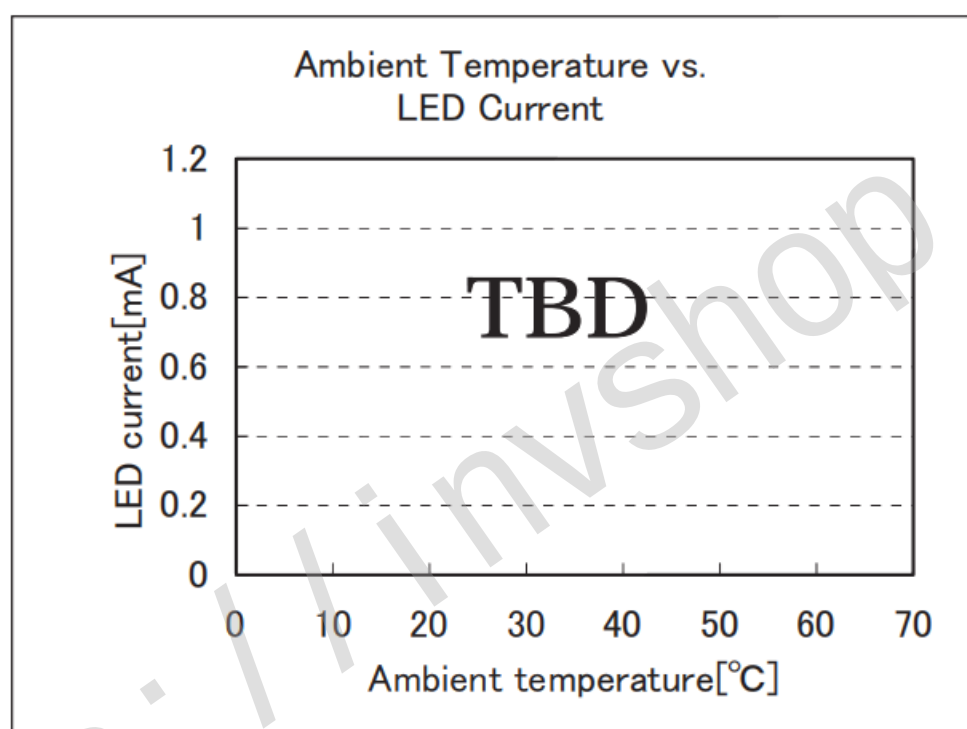

\* The values in the graph are just for reference.

## (7)Electrical characteristics

## 7-1) Recommended operating conditions


## A) TFT-LCD panel driving section

Table4

GND=0V

| Parameter                     |         | Symbol | Min.    | Typ. | Max.    | Unit | Remarks    |
|-------------------------------|---------|--------|---------|------|---------|------|------------|
| Supply voltage for COG driver | Digital | VSHD   | +3.0    | +3.3 | +3.6    | V    |            |
| Input voltage (Low)           |         | VILS   | GND     | -    | 0.2VSHD | V    | 【Note 7-1】 |
| Input voltage (High)          |         | VIHS   | 0.8VSHD | -    | VSHD    | V    | 【Note 7-1】 |
| Input current (Low)           |         | IILS   | -       | -    | TBD     | μA   | 【Note 7-1】 |
| Input current (High)          |         | IIHS   | -       | -    | TBD     | μA   | 【Note 7-1】 |

※Cautions when you turn on or off the power supply

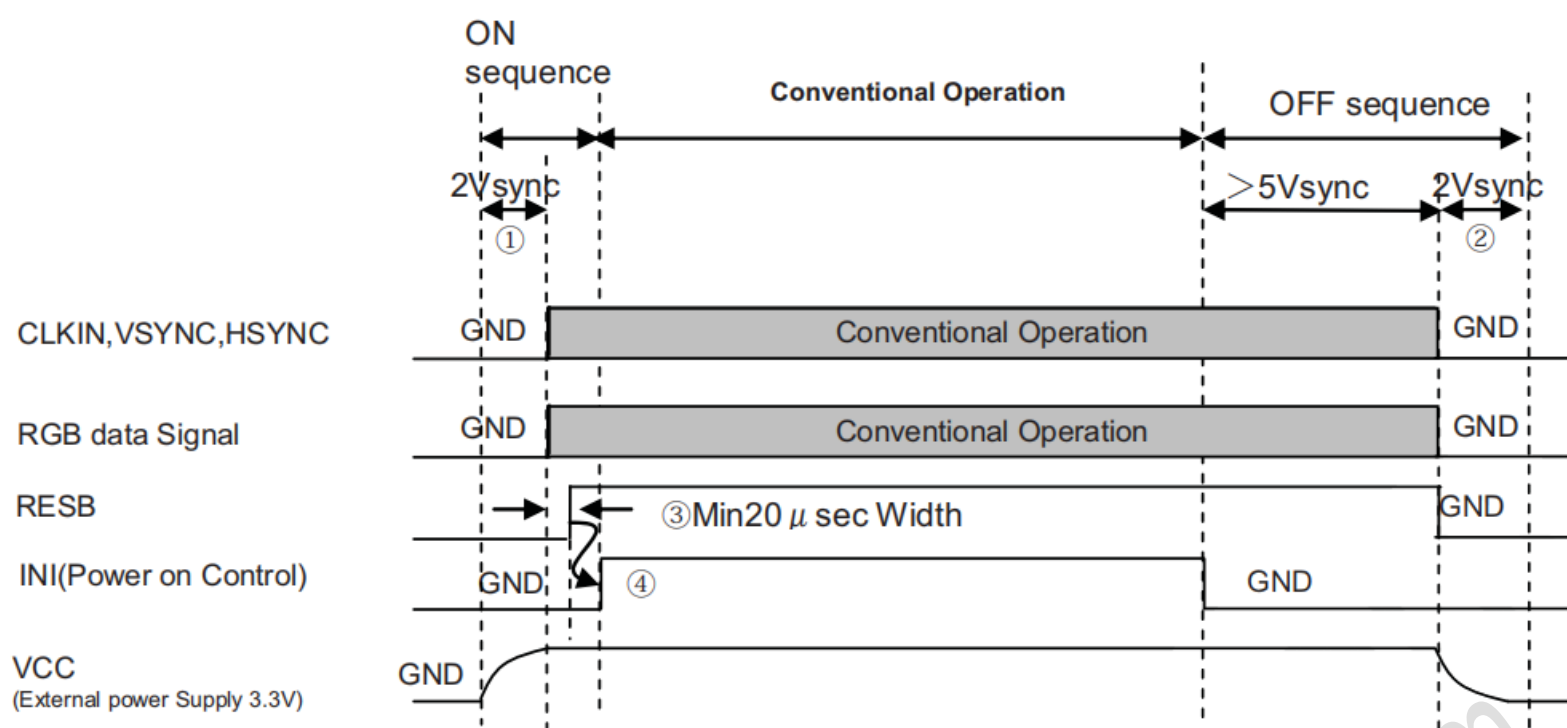

※After VCC is ON ,please make sure to start HVIF(CLK,HSYNC,VSYNC,RGB data signal) synchronized signal before INI(Power on control) becomes High.

※Please keep HVIF(CLK,HSYNC,VSYNC,RGB data signal) synchronized signal High for more than 5 vertical period after INI becomes Low to shut down VCC.

①Stabilize VCC(+3.3V) within double vertical periods.

②VCC is stabilized to GND within double vertical periods.

③When the power supply is on again after Power Supply Off sequence ,please put the RESB signal before Power Supply On sequence. RESB signal needs LOW level more than 20  $\mu$  sec after VCC(+3.3V) ON.

④Please Set RESB signal before INI Signal.

【Note 7-1】 INI,VSYNC,HSYNC,MO,UD,LR,CLK,R0~R5,G0~G5,B0~B5,DEN,RESB terminals are applied.

Each voltage should be kept to satisfy absolute maximum ratings.

If the applied voltage goes beyond absolute maximum ratings, the LCD module may be broken eternally.

B) Back light driving section

Table 5

Ta=25℃

| Parameter         | Symbol | MIN | TYP     | MAX    | Units | Remarks terminal |
|-------------------|--------|-----|---------|--------|-------|------------------|
| LED voltage(VL)   | VL     | —   | (27.9)  | (31.5) | V     | 【Note 7-2】 (TBD) |
| LED current(IL)   | IL     | —   | (16)    | (20)   | mA    |                  |
| Power consumption | WL     | —   | (446.4) | (630)  | mW    | 【Note 7-3】 (TBD) |

\* The values in the graph are just for reference.

【Note 7-2】 VL(TYP) at IL(16mA). VL(MAX) at IL(20mA).

【Note 7-3】 Calculated reference value. WL=(VL\*IL)


## 7-2) Timing Characteristics of input signals

Table 6 AC Characteristics

| Parameter                       | Symbol            | MODE        | Min.          | Typ.          | Max.              | Unit | Note                      |
|---------------------------------|-------------------|-------------|---------------|---------------|-------------------|------|---------------------------|
| CLK Period                      | t <sub>CLK</sub>  | VGA<br>QVGA | (38)<br>(152) | 39.7<br>158.8 | (41.7)<br>(166.8) | ns   | CLK                       |
| CLK Low Width                   | t <sub>CLKL</sub> |             | (15)          | -             | -                 | ns   |                           |
| CLK High Width                  | t <sub>CLKH</sub> |             | (15)          | -             | -                 | ns   |                           |
| Data setup time                 | t <sub>DS</sub>   |             | (10)          | -             | -                 | ns   | R0~R5,<br>G0~G5,<br>B0~B5 |
| Data hold time                  | t <sub>DH</sub>   |             | (10)          | -             | -                 | ns   |                           |
| Pulse width of DEN              | t <sub>HHW</sub>  | VGA<br>QVGA | -             | 480<br>240    | -                 |      | HSYNC                     |
| Period of HSYNC                 | t <sub>HS</sub>   | VGA<br>QVGA | -             | 648<br>324    | -                 | CLK  |                           |
| Pulse width of HSYNC            | t <sub>HSW</sub>  |             | -             | 2             | -                 | CLK  |                           |
| HSYNC setup time                | t <sub>HSYS</sub> |             | (10)          | -             | -                 | ns   |                           |
| HSYNC hold time                 | t <sub>HSYH</sub> |             | (10)          | -             | -                 | ns   |                           |
| Horizontal Back Porch           | t <sub>HBP</sub>  | VGA<br>QVGA | (28)<br>(14)  | 78<br>38      | (166)<br>(82)     | CLK  |                           |
| Horizontal Front Porch          | t <sub>HFP</sub>  | VGA<br>QVGA | (0)<br>(0)    | 88<br>44      | (138)<br>(68)     | CLK  |                           |
| Period of VSYNC                 | t <sub>VS</sub>   |             | (57)          | 59.94         | (63)              | Hz   | VSYNC                     |
| Period of VSYNC                 | t <sub>VS</sub>   | VGA<br>QVGA | -<br>-        | 648<br>324    | -                 | HCCY |                           |
| Pulse width of VSYNC            | t <sub>VSW</sub>  |             | -             | 1             | -                 | HCCY |                           |
| VSYNC setup time                | t <sub>VSYS</sub> |             | (10)          | -             | -                 | ns   |                           |
| VSYNC hold time                 | t <sub>VSYH</sub> |             | (10)          | -             | -                 | ns   |                           |
| VSYNC-HSYNC<br>phase difference | t <sub>VHD</sub>  |             | 0             |               | HCCY-2            | CLK  | 【Note 7-4】                |
| Input Signal Rising Time        | t <sub>RISE</sub> |             | -             | -             | (5)               | ns   | 【Note 7-5】                |
| Input Signal Falling Time       | t <sub>FALL</sub> |             | -             | -             | (5)               | ns   | 【Note 7-5】                |
| Reset Pulse Width               | t <sub>RESW</sub> |             | 20            | -             | -                 | μs   | 【Note 7-6】                |


【Note 7-4】 HCCY = HSYNC Period(VGA:Typ.648CLK, QVGA:Typ.324CLK)

【Note 7-5】 INI, VSYNC, HSYNC, CLK, R0~R5, G0~G5, B0~B5, DEN, RESB terminals are applied.

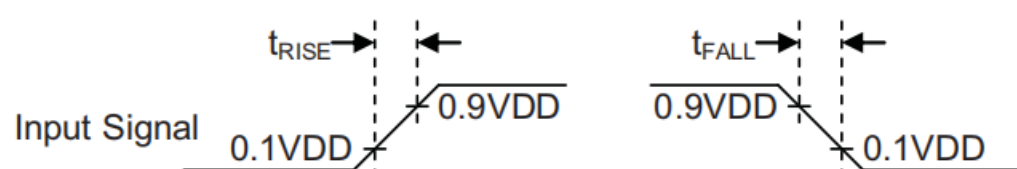

【Fig 7-1 Input Signal Rising/Falling Timing】

【Note 7-6】 Reset Signal Timing chart

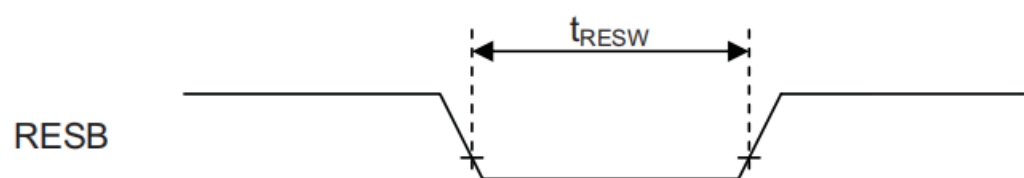

【Fig 7-2 Reset Timing Signal】

### 7-3) Power consumption

Measurement condition : Vsync=59.94Hz, Hsync=38.84kHz, CLK=25.17MHz, Ta=25°C (VGA Mode)

Table 7

(when conventional scan mode)

| Parameter          |         | Sym  | Conditions | MIN | TYP  | MAX | Unit | Remarks   |
|--------------------|---------|------|------------|-----|------|-----|------|-----------|
| COG driver current | Digital | ISHD | VSHD=+3.3V | —   | (40) | TBD | mA   | 【Note7-7】 |

【Note 7-7】 TBD Pattern

[Portrait VGA Mode Timing Chart]

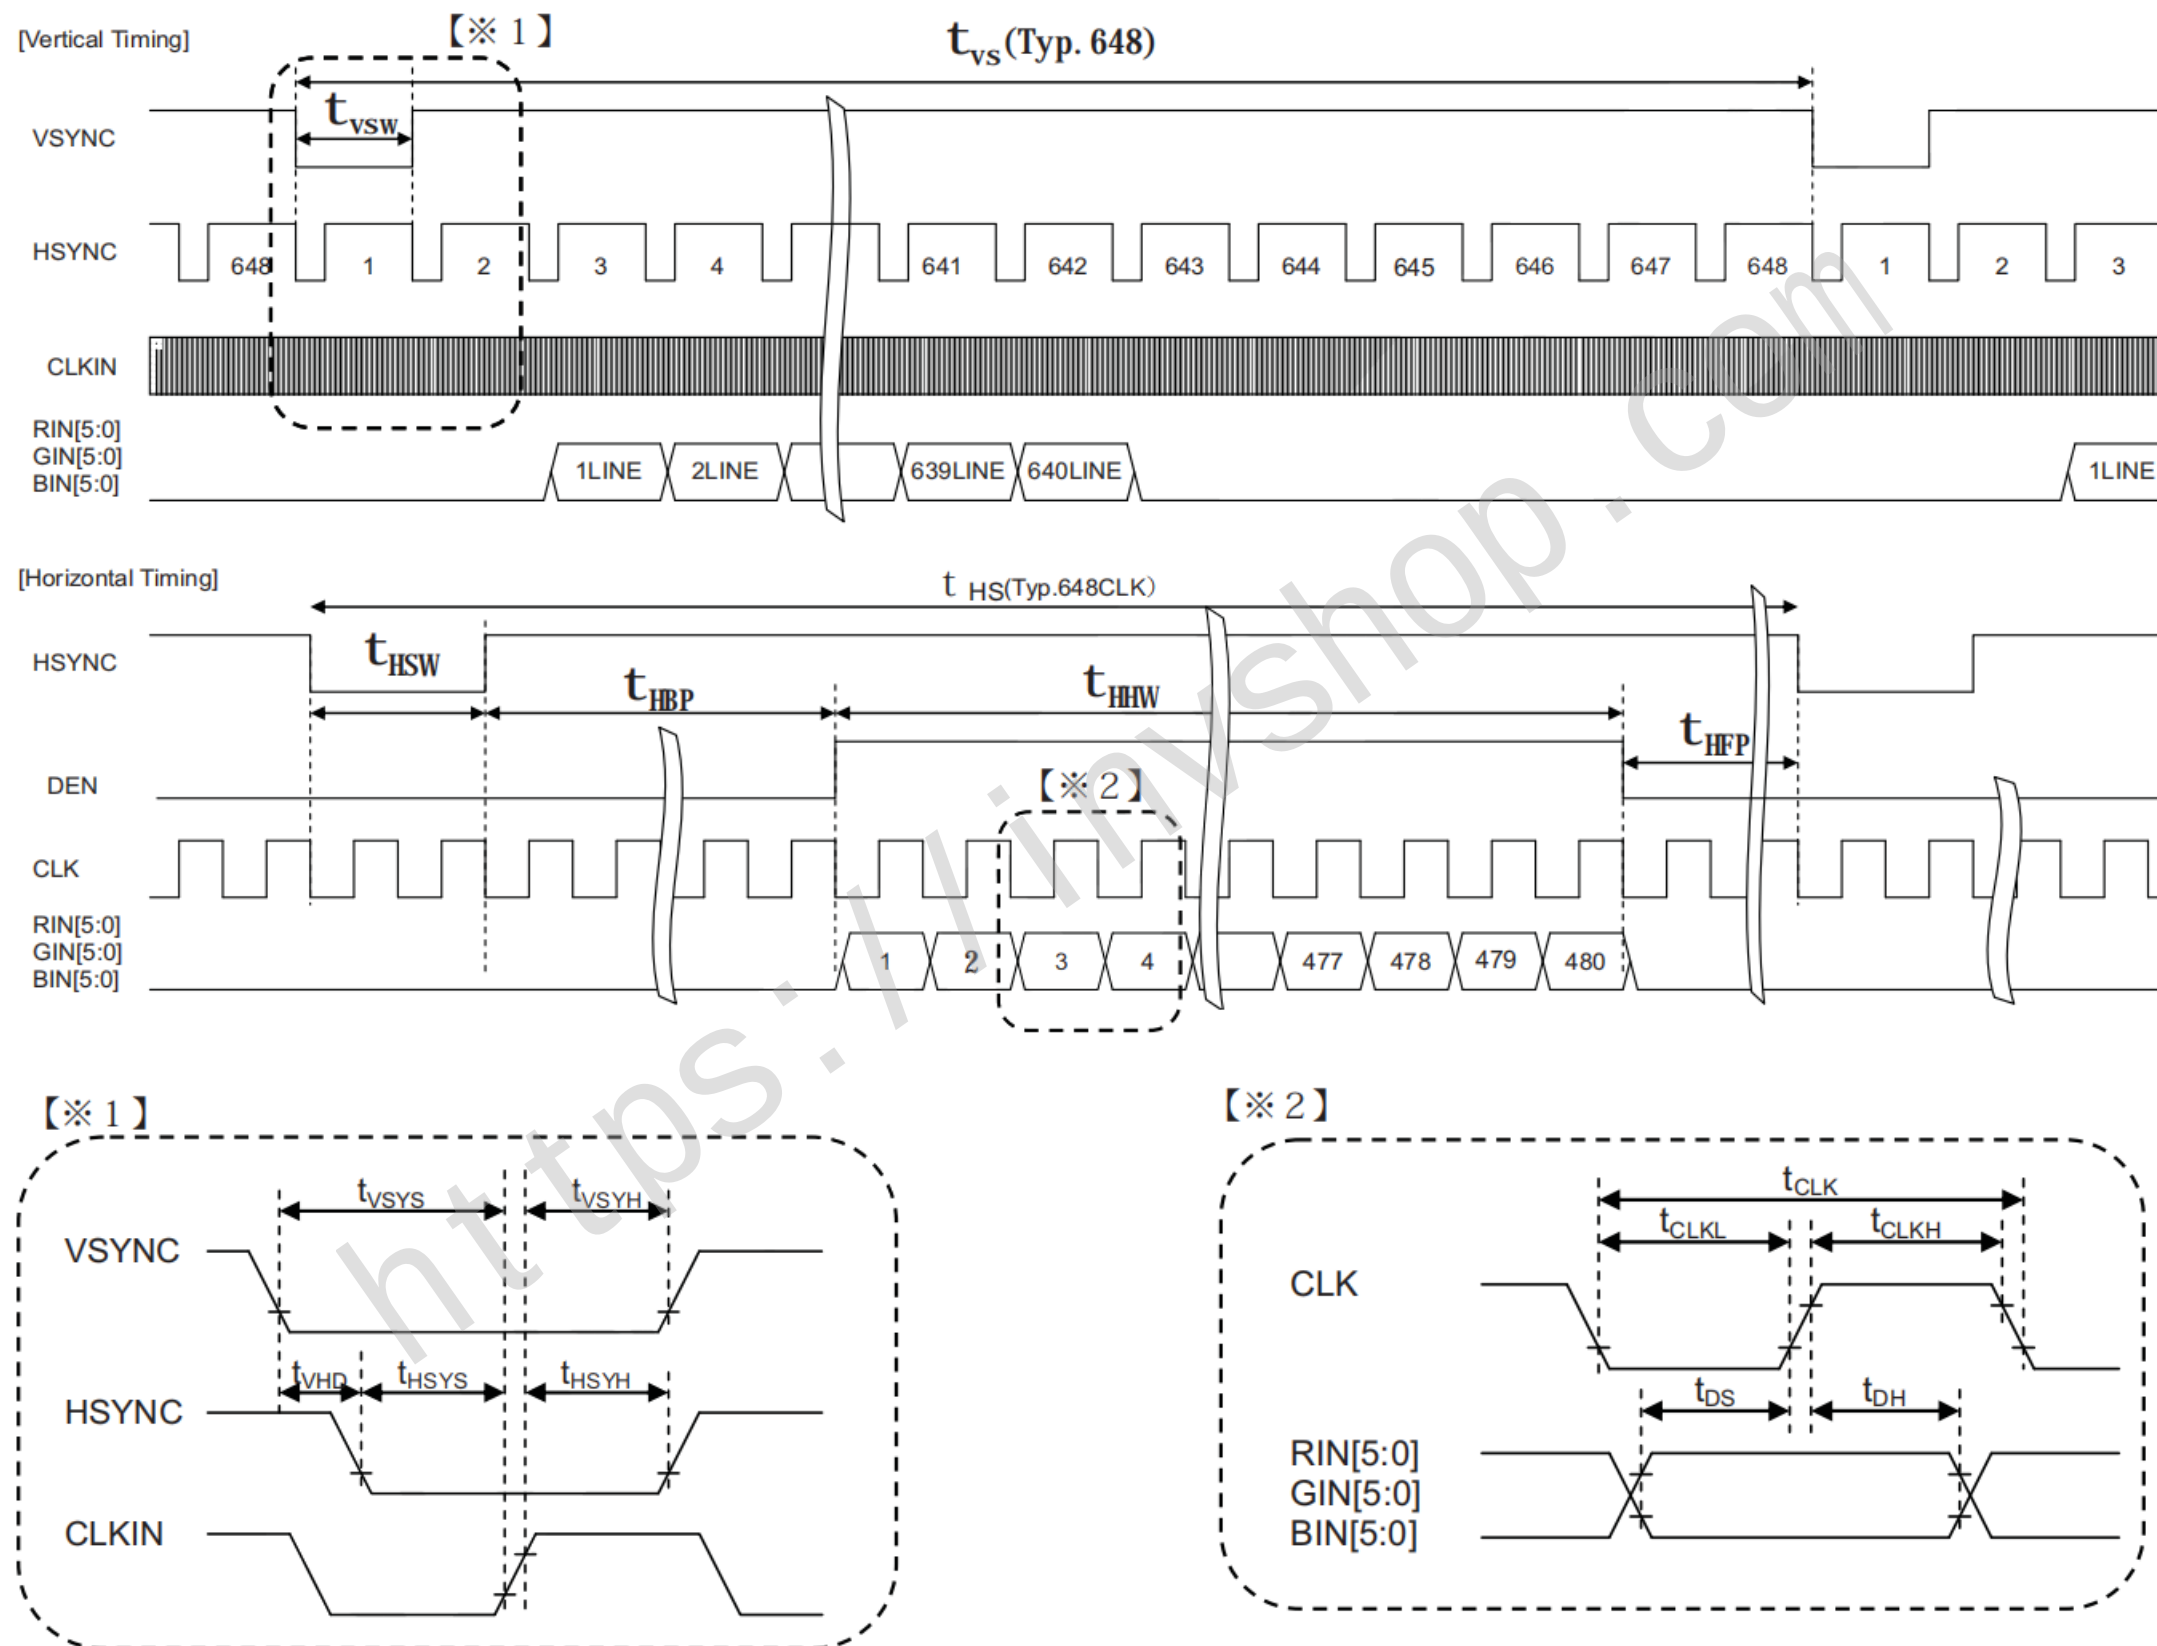


Fig 7-3 LCDIF signal timing in Portrait VGA mode

[Portrait QVGA Mode Timing Chart]

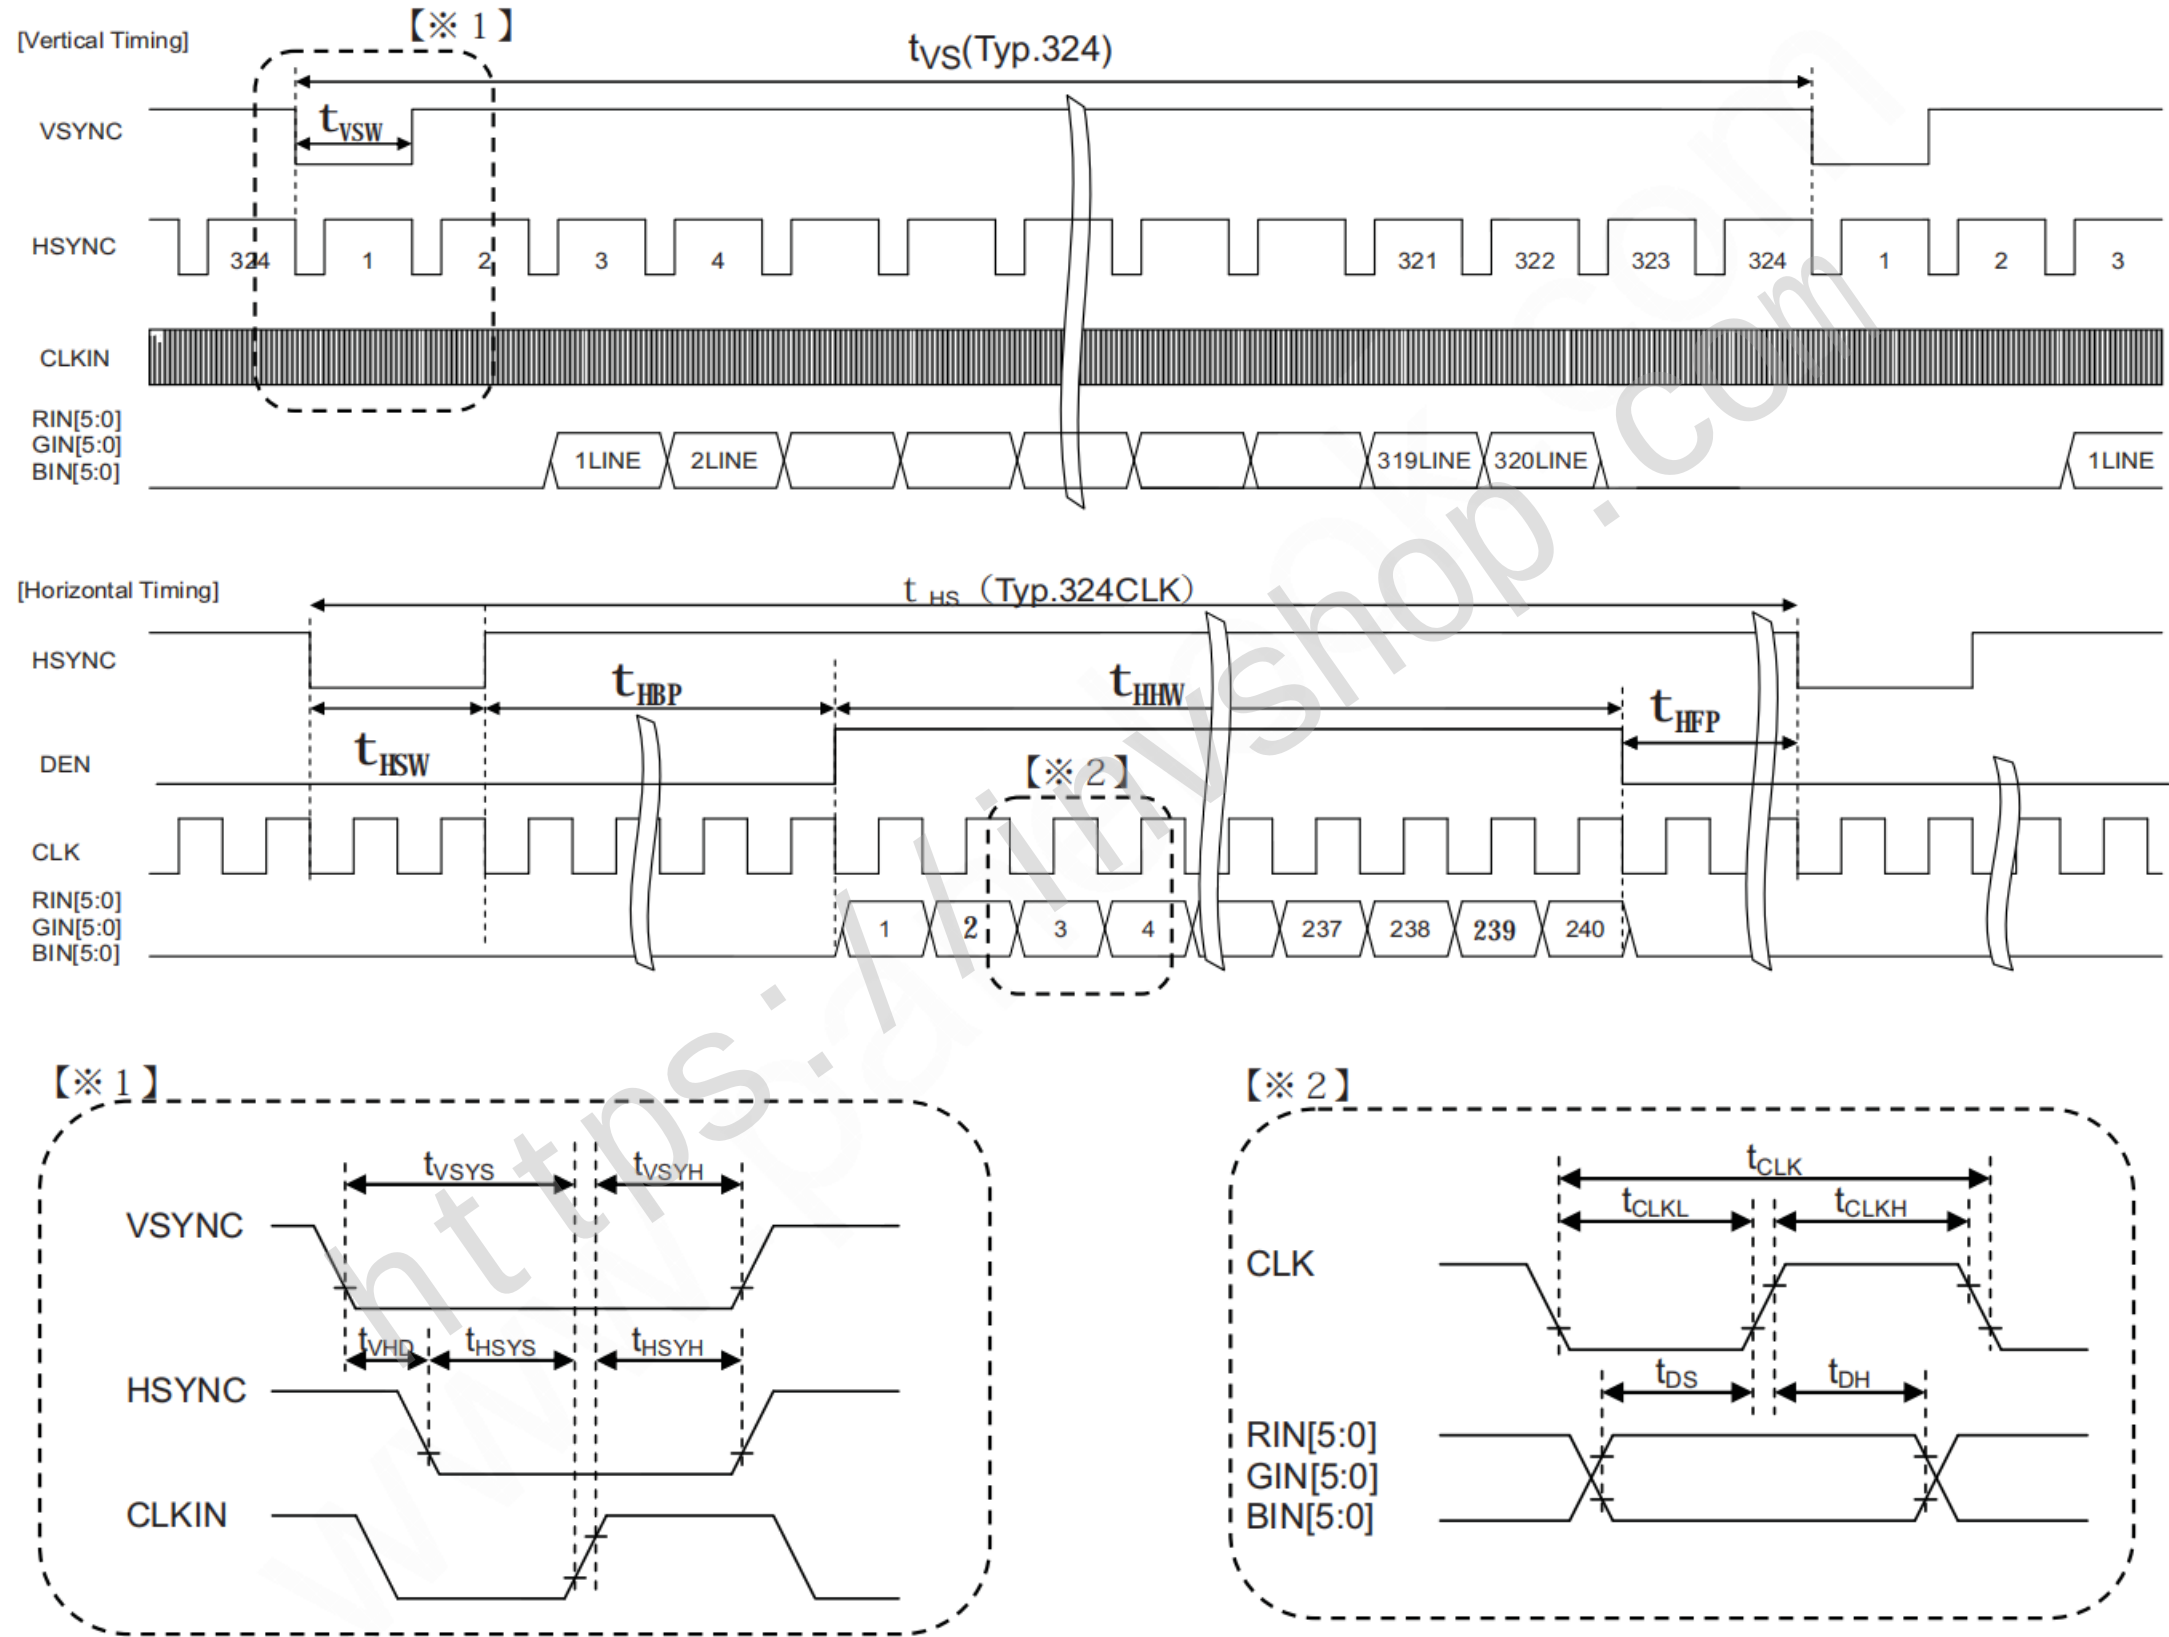


Fig 7-4 LCDIF signal timing in Portrait QVGA mode

## (8) Input Signals, Basic Display Color and Gray Scale of Each Color

Table 8 18bit RGB color display mode

|                     | Colors &<br>Gray scale | Data signal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|---------------------|------------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
|                     | Gray<br>Scale          | R0          | R1 | R2 | R3 | R4 | R5 | G0 | G1 | G2 | G3 | G4 | G5 | B0 | B1 | B2 | B3 | B4 | B5 |  |
| Basic color         | Black                  | —           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Blue                   | —           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |  |
|                     | Green                  | —           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Cyan                   | —           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |  |
|                     | Red                    | —           | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Magenta                | —           | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |  |
|                     | Yellow                 | —           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  |  |
|                     | White                  | —           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |  |
| Gray Scale of red   | Black                  | GS0         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↑                      | GS1         | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Darker                 | GS2         | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↑                      | ↓           | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |  |
|                     | ↓                      | ↓           | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |  |
|                     | Brighter               | GS61        | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↓                      | GS62        | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Red                    | GS63        | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
| Gray Scale of green | Black                  | GS0         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↑                      | GS1         | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Darker                 | GS2         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↑                      | ↓           | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |  |
|                     | ↓                      | ↓           | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |  |
|                     | Brighter               | GS61        | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↓                      | GS62        | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Green                  | GS63        | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  |  |
| Gray Scale of bleu  | Black                  | GS0         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |  |
|                     | ↑                      | GS1         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |  |
|                     | Darker                 | GS2         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |  |
|                     | ↑                      | ↓           | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |  |
|                     | ↓                      | ↓           | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |  |
|                     | Brighter               | GS61        | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  |  |
|                     | ↓                      | GS62        | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  |  |
|                     | Bleu                   | GS63        | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |  |

0 : Low level voltage      1 : High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. According to the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

## (9)Optical characteristics

## 9-1) Not driving the Back light condition


Table 9

Ta=25°C

| Parameter           |      | Symbol  | Condition | Min | Typ | Max | Unit   |              |
|---------------------|------|---------|-----------|-----|-----|-----|--------|--------------|
| Viewing angle range |      | θ21,22  | CR≥2      | TBD | TBD | -   | degree | [Note 9-1,2] |
|                     |      | θ11, 12 |           | TBD | TBD | -   | degree |              |
| Contrast ratio      |      | CRmax   | θ =0°     | TBD | TBD | -   |        | [Note 9-2,4] |
| Response time       | Rise | τ r     | θ =0°     | -   | TBD | TBD | ms     | [Note 9-3]   |
|                     | Fall | τ d     |           | -   | TBD | TBD | ms     |              |
| White chromaticity  |      | x       |           | TBD | TBD | TBD |        | [Note 9-4]   |
|                     |      | y       |           | TBD | TBD | TBD |        |              |
| Reflection ratio    |      | R       | θ =0°     | TBD | (3) | -   | %      | [Note 9-5]   |

\* The measuring method of the optical characteristics is shown by the following figure.

\* A measurement device is Otsuka luminance meter LCD5200.(With the diffusion reflection unit.)

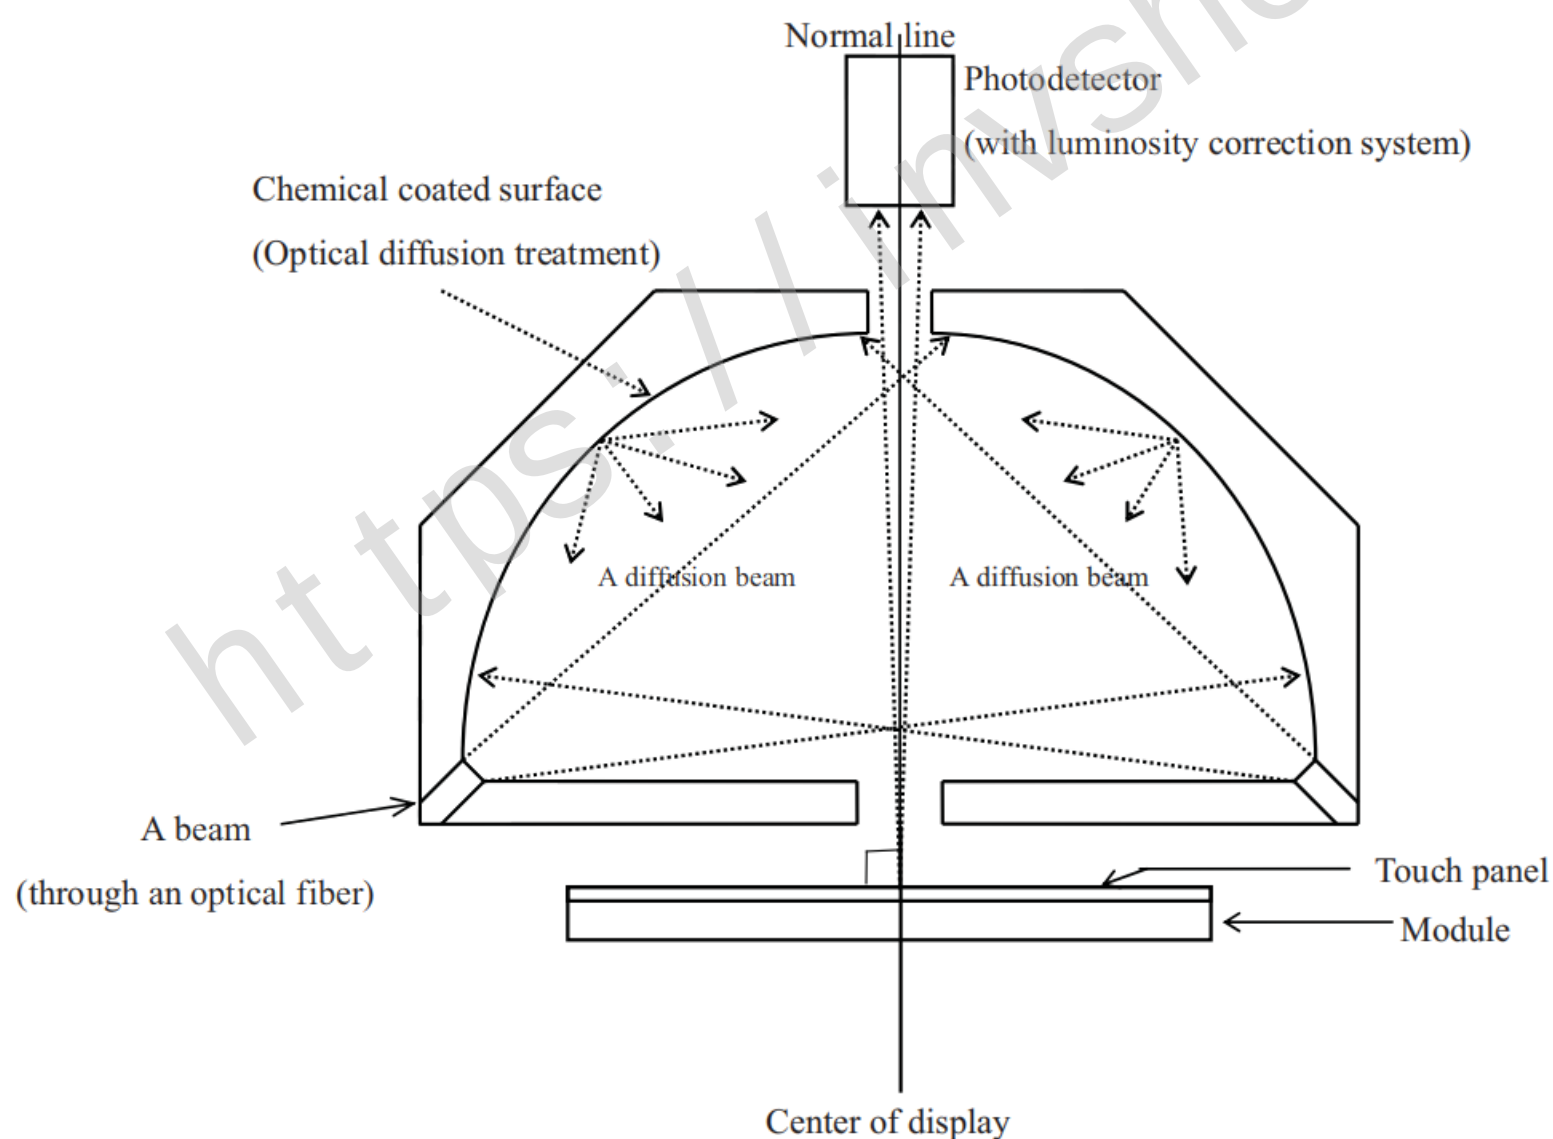

**Measuring method (a) for optical characteristics**

## 9-2) Driving the Back light condition

Table 10


Ta=25°C

| Parameter           |      | Symbol           | Condition          | Min  | Typ   | Max | Unit              | Remarks        |
|---------------------|------|------------------|--------------------|------|-------|-----|-------------------|----------------|
| Viewing angle range |      | $\theta_{21,22}$ | (CR $\geq$ 5)      | TBD  | (80)  | -   | degree            | [Note 9-1,2,6] |
|                     |      | $\theta_{11,12}$ |                    | TBD  | (80)  | -   | degree            |                |
| Contrast ratio      |      | Crmax            | $\theta = 0^\circ$ | TBD  | (200) | -   |                   | [Note 9-2]     |
| Response time       | Rise | $\tau_r$         |                    | -    | TBD   | TBD | ms                | [Note 9-3]     |
|                     | Fall | $\tau_d$         |                    | -    | TBD   | TBD | ms                |                |
| White chromaticity  |      | x                |                    | TBD  | TBD   | TBD |                   |                |
|                     |      | y                |                    | TBD  | TBD   | TBD |                   |                |
| NTSC ratio          |      | S                |                    | -    | (45)  | -   | %                 |                |
| Brightness          |      | Y                | $\theta = 0^\circ$ | TBD  | (165) | -   | cd/m <sup>2</sup> | (IL=16mA)      |
| Uniformity          |      | U                | $\theta = 0^\circ$ | (70) | TBD   | -   | %                 | [Note 9-7]     |

\* The measuring method of the optical characteristics is shown by the following figure.


\* A measurement device is TOPCON luminance meter SR-3.(Viewing cone 1)

Photodetector(including luminosity factor)

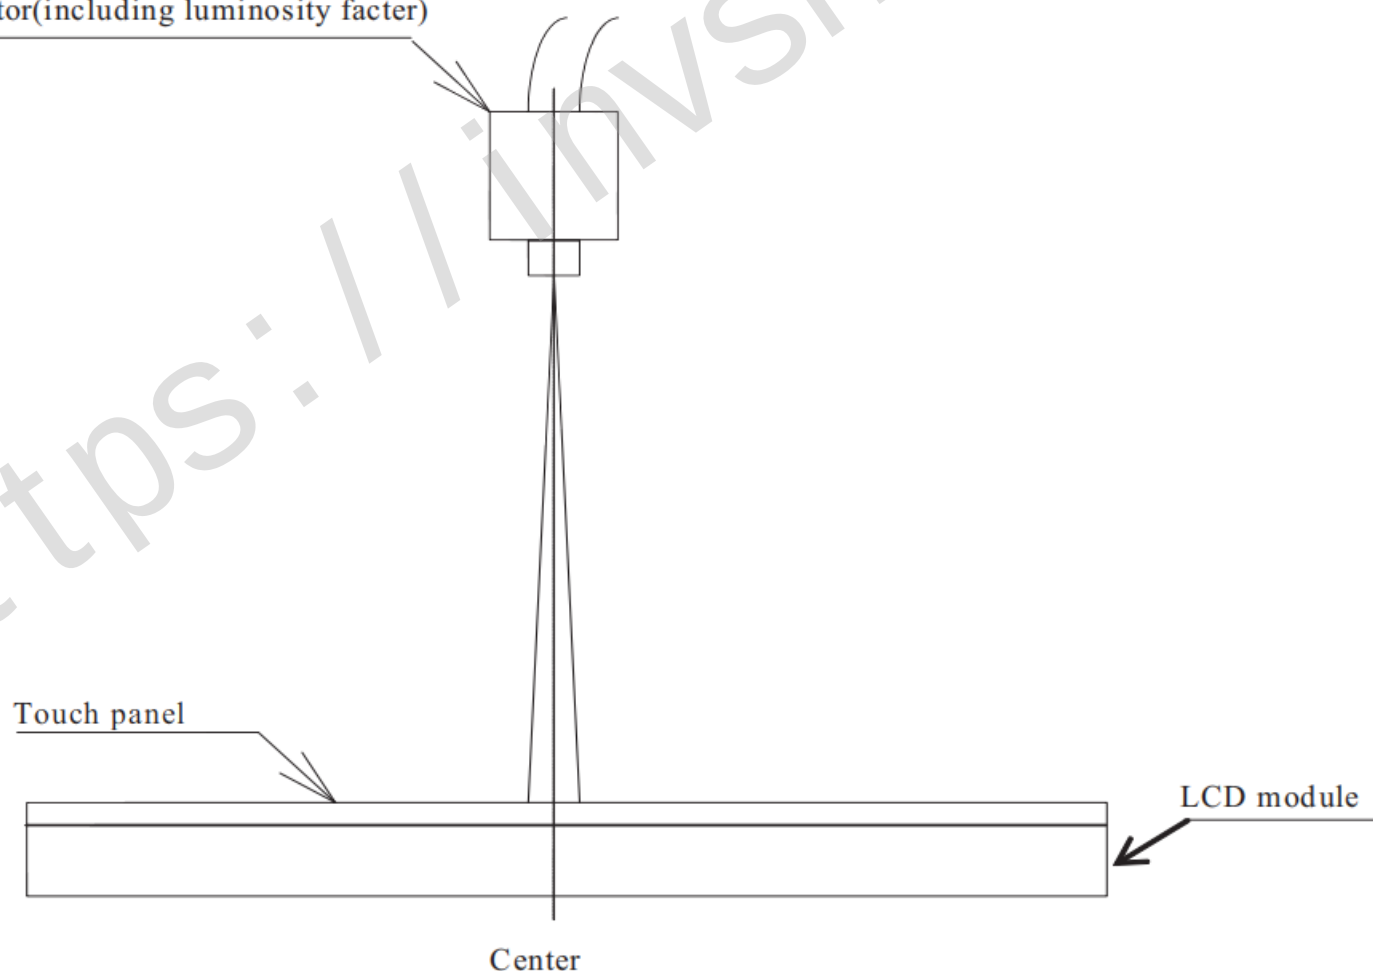

【Measuring method for optical characteristics】

[Note 9-1] Viewing angle range is defined as follows.

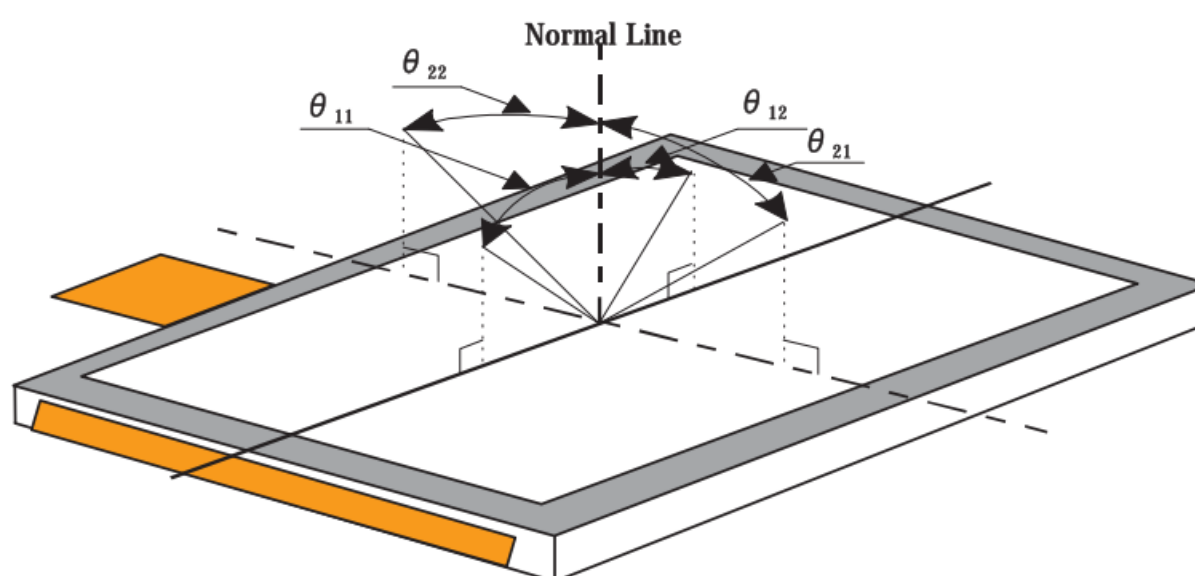

### 【Definition for viewing angle】

[Note 9-2] Definition of contrast ratio:


The contrast ratio is defined as follows:

$$\text{Contrast ratio (CR)} = \frac{\text{Photodetector output with all pixels white (GS63)}}{\text{Photodetector output with all pixels black (GS0)}}$$

$V_{\text{COMAC}} = 5.0 \text{ V}_{\text{p-p}}$

[Note 9-3] Definition of response time:

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

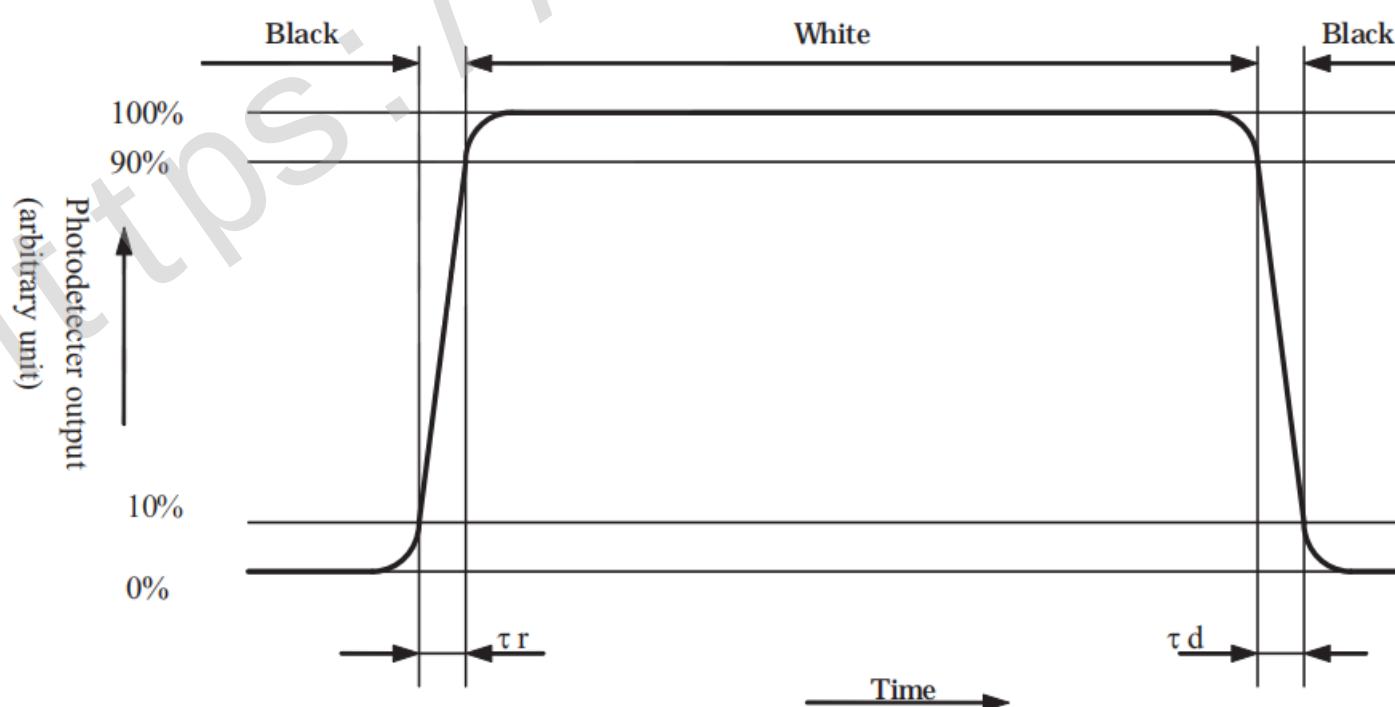

[Note 9-4] A measurement device is Minolta CM-2002.

[Note 9-5] Definition of reflection ratio

Reflection ratio =


$$\frac{\text{Light detected level of the reflection by the LCD module}}{\text{Light detected level of the reflection by the standard white board}}$$

[Note 9-6] A measurement device is ELDIM EZContrast

[Note 9-7] Definition of Uniformity

$$\text{Uniformity} = \frac{\text{Minimum Brightness}}{\text{Maximum Brightness}} \times 100(\%)$$

The brightness should be measured on the 9-point as shown in the right figure.

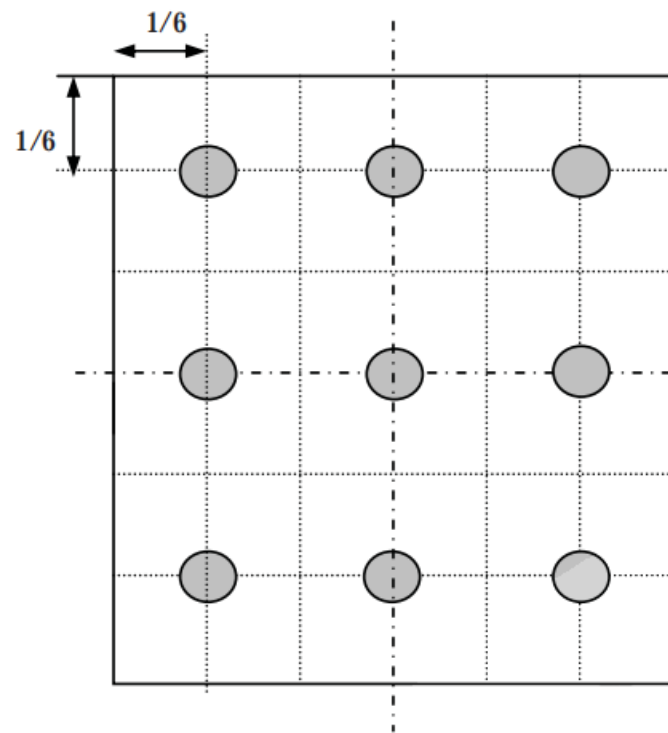

#### (10) Display quality

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standards(TBD) TFT-LCD.

#### (11) Touch panel characteristics

Table 11

| Parameter                         | Min.  | Typ.  | Max.   | Unit | Remark                    |
|-----------------------------------|-------|-------|--------|------|---------------------------|
| Input voltage                     | -     | (5.0) | (7.0)  | V    | Provisional specification |
| Resistor between terminals(X1-X2) | (200) |       | (650)  | Ω    |                           |
| Resistor between terminals(Y1-Y2) | (200) |       | (640)  | Ω    |                           |
| Line linearity(X direction)       | -     | -     | (1.5)  | %    |                           |
| Line linearity(Y direction)       | -     | -     | (1.5)  | %    |                           |
| Insuration resistance             | (20)  | -     | -      | MΩ   |                           |
| Minimum tension for detecting     | -     | -     | (0.79) | N    |                           |

#### (12) Mechanical characteristics

##### 12-1) External appearance

See Fig. 1 Outline Dimension

##### 12-2) FPC (for LCD panel) characteristics

Specific connector

LCD-FPC : HIROSE FH23-51S-0.3SHAW(05) (Bottom contact only)

#### (13) Mechanical characteristics

##### 13-1) External appearance

See Fig. 1

##### 13- 2 ) Design guidance for touchpanel(T/P)

##### 13-2-1)Example of housing design

(1)If an consumer will put a palm on housing in normal usage, care should be taken as follows.

(2)Keep the gap, for example 0.3 to 0.7mm, between bezel edge and T/P surface.

The reason is to avoid the bezel edge from contacting T/P surface that may cause a “short” with bottom layer(See Fig.2)

(3) Insertion a cushion material is recommended.

(4) The cushion material should be limited just on the busbar insulation paste area.

If it is over the transparent insulation paste area, a "short" may be occurred.

(5) There is one where a resistance film is left in the T/P part of the end of the pole.

Design to keep insulation from the perimeter to prevent from mis-operation and so on.

### 13-2-2) Mounting on display and housing bezel

(1) In all cases, the T/P should be supported from the backside of the glass.

(2) Do not use an adhesive-tape to bond it on the front of T/P and hang it to the housing bezel.

(3) Never expand the T/P top layer (PET-film) like a balloon by internal air pressure.

The life of the T/P will be extremely short.

(4) Top layer, PET, dimension is changing with environmental temperature and humidity.

Avoid a stress from housing bezel to top layer, because it may cause "waving".

(5) The input to the Touchpanel sometimes distorts touch panel itself.

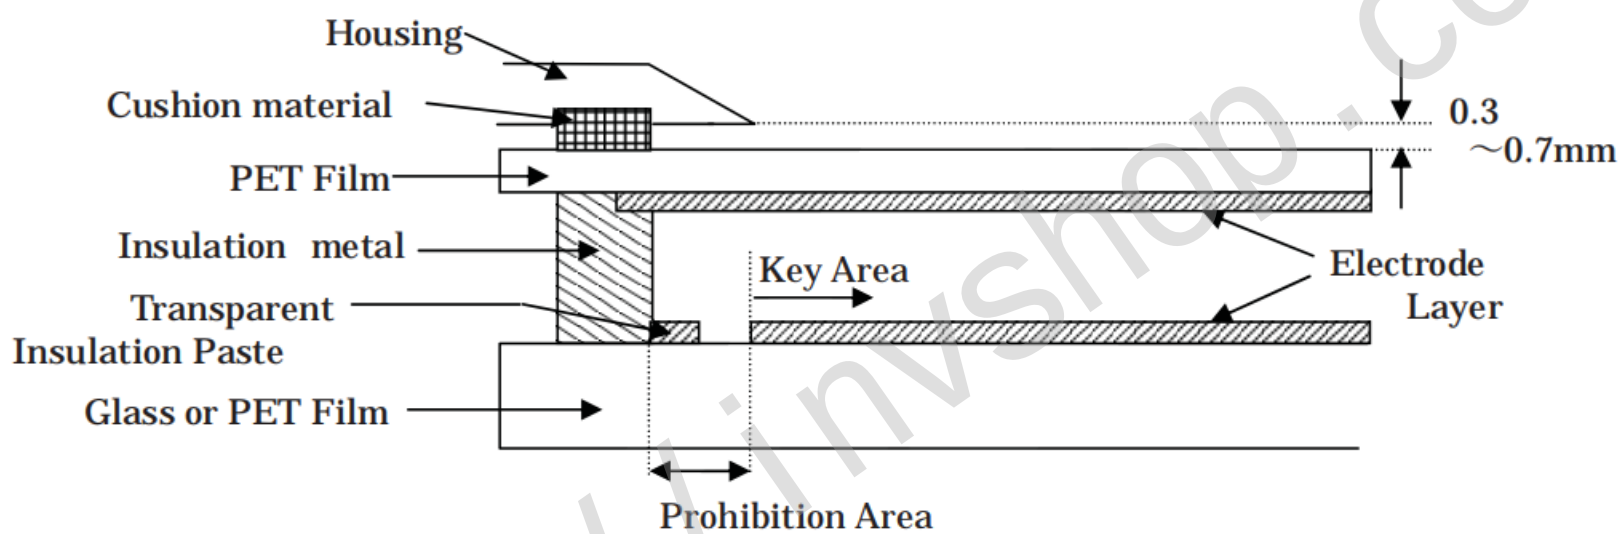


Fig.2

#### (14) Handling Precautions

##### 14-1) Insertion and taking out of FPCs

Be sure insert and take out of the FPC into the connector of the set after turning off the power supply on the set side.

##### 14-2) Handling of FPCs

The FPC for LCD panel shall be bent only slit portion. The bending slit shall be bent uniformly on the whole slit portion with bending radius larger than 1.0mm ,and only inner side (back side of the module). Don't bend it outer side (display surface side).

Don't give the FPCs too large force, for example, hanging the module with holding FPC. Moreover, Do not put stress on the components mounted on FPC to avoid failure of the components.

##### 14-3) Installation of the module

On mounting the module, be sure to fix the module on the same plane. Taking care not to warp or twist the module.

##### 14-4) Precaution when mounting

- (1) If water droplets and oil attaches to it for a long time, discoloration and staining occurs. Wipe them off immediately.
- (2) Glass is used for the TFT-LCD panel or touch panel. If it is dropped or bumped against a hard object, it may be broken. Handle it with sufficient care.
- (3) As the CMOS IC is used in this module, pay attention to static electricity when handling it. Take a measure for grounding on the human body.

##### 14-5) Others

- (1) The liquid-crystal is deteriorated by ultraviolet rays. Do not leave it in direct sunlight and strong ultraviolet rays for many hours.
- (2) If it is kept at a temperature below the rated storage temperature, it becomes coagulated and the panel may be broken. Also, if it is kept at a temperature above the rated storage temperature, it becomes isotropic liquid and does not return to its original state. Therefore, it is desirable to keep it at room temperature as much as possible.
- (3) If the LCD breaks, don't put internal liquid crystal into the mouth. When the liquid crystal sticks to the hands, feet and clothes, wash it out immediately.
- (4) Wipe off water drop or finger grease immediately. Long contact with water may cause discoloration or spots.
- (5) Observe general precautions for all electronic components.
- (6) Static image should not be displayed more than 5 minutes in order to prevent from occurrence of residual image.

## (15) Reliability Test Conditions for TFT-LCD Module

Table 12

| No. | Test items                                        | Test conditions                                                                                                                                                                                       |
|-----|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | High temperature storage test                     | Ta=+70℃ 240h                                                                                                                                                                                          |
| 2   | Low temperature storage test                      | Ta=−20℃ 240h                                                                                                                                                                                          |
| 3   | High temperature and high humidity operating test | Tp=+40℃ , 95%RH 240h<br>(But no condensation of dew)                                                                                                                                                  |
| 4   | High temperature operating test                   | Tp=+60℃ 240h                                                                                                                                                                                          |
| 5   | Low temperature operating test                    | Tp=−10℃ 240h                                                                                                                                                                                          |
| 6   | Electro static discharge test                     | ±200V · 200pF(0Ω) to Terminals(Contact)<br>(1 time for each terminals)<br>±8kV · 150pF(330Ω) to Housing bezel or TP(Contact)<br>±15kV · 150pF(330Ω) to Housing bezel or TP(in Air)                    |
| 7   | Shock test                                        | 980 m/s <sup>2</sup> , 6 ms<br>±X, ±Y, ±Z 3 times for each direction<br>(JIS C0041, A-7 Condition C)                                                                                                  |
| 8   | Vibration test                                    | Frequency range: 10Hz~55Hz<br>Stroke: 1.5 mm Sweep: 10Hz~55Hz<br>X,Y,Z 2 hours for each direction (total 6 hours)<br>(JIS C0040, A-10 Condition A)                                                    |
| 9   | Heat shock test                                   | Ta=−20℃~+70℃ / 5 cycles<br>(1h) (1h)                                                                                                                                                                  |
| 10  | Point activation test<br>(Touch panel)            | Hit it (1,000,000) times with a silicon rubber of R8 HS 60.<br>Hitting force :2.45N(250gf)<br>Hitting speed : 3 times per second                                                                      |
| 11  | Writing friction resistance test<br>(Touch panel) | Slide Pen (100,000) times under following conditions:<br>Pen : 0.8Rmm Polyacetal stylus<br>Load : 2.45N(250gf)<br>Speed : 3 strokes per second<br>Stroke : 35mm<br>Testing apparatus : shown in Fig.3 |
| 12  | FPC Bending Test                                  | (Bending 10 times by bending radius R1.0mm and angle=180°<br>Only inner side[back side of the module])                                                                                                |

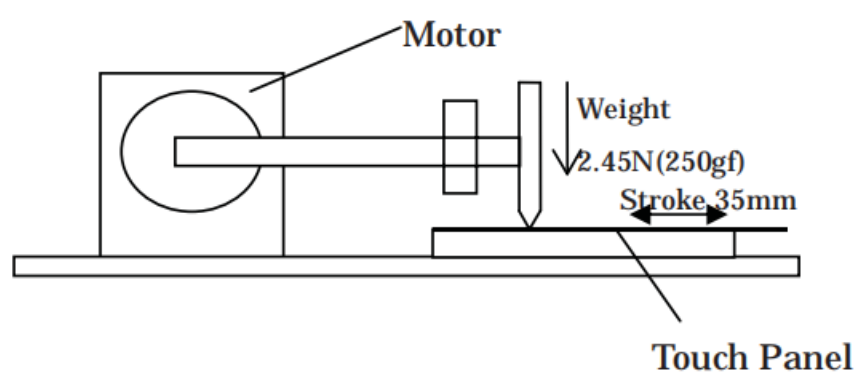


Fig.3

【Note】 Ta = Ambient temperature, Tp = Panel temperature

【Check items】

• Test No.1~9,12

In the standard condition, there shall be no practical problems that may affect the display function.

• Test No.10~No.11

The measurements after the tests are satisfied (11)-Table 11 (Touch panel characteristics)

(16) Others

16-1) Indication of lot number

The lot number is shown on a label. Attached location is shown in Fig.1 (Outline Dimensions).

16-2) Used Regulation of Chemical Substances Breaking Ozone Stratum

Substances with the object of regulating : CFCS, Carbon tetrachloride, Halon

1,1,1-Trichloro ethane (Methyl chloroform)

- (a) This LCD module, Constructed part and Parts don't contain the above substances.
- (b) This LCD module, Constructed part and Parts don't contain the above substances in processes of manufacture.

16-3) If some problems arise about mentioned items in this document and other items, the user of the TFT-LCD module and Sharp will cooperate and make efforts to solve the problems with mutual respect and good will.


(17) Forwarding form (TBD)

- a) Piling number of cartons : TBD
- b) Package quality in one cartons : TBD pcs
- c) Carton size : TBD mm \* TBD mm \* TBD mm
- d) Total mass of 1 carton filled with full modules : TBD g

Conditions for storage

Environment

- (1) Temperature : 0~40℃
- (2) Humidity : 60%RH or less (at 40℃)  
No dew condensation at low temperature and high humidity.
- (3) Atmosphere : Harmful gas, such as acid or alkali which bites electronic components and/or wires, must not be detected.
- (4) Period : about 3 months
- (5) Opening of the package : In order to prevent the LCD module from breakdown by electrostatic charges, please control the room humidity over 50%RH and open the package taking sufficient countermeasures against electrostatic charges, such as earth, etc.

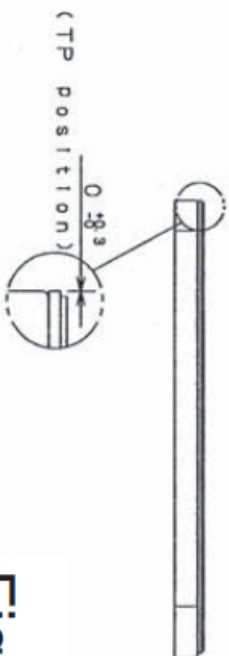

△. LCD-FPC bend radius: Min. 0.6mm

• Guarantee of appearance = LCD Active Area

• General tolerance is  $\pm 0.5\text{mm}$

- Take care in set design to hide

the scratches and bubbles appeared on

the polarizer or other frame areas

which is located outside of guarantee area.

• The light of Back Light is leaking from BM

outside, please light shielding b

• The tolerance of module width

excise and water case and L.P.C.

to the shaded area.

When cab-cushion is applied other than the shaded area, it may cause malfunction and influenced the reliability.

|                        |                                                                                   |                       |                        |                      |                           |                                   |
|------------------------|-----------------------------------------------------------------------------------|-----------------------|------------------------|----------------------|---------------------------|-----------------------------------|
| <b>△</b>               |                                                                                   |                       |                        |                      | <b>ORIGINAL MODEL</b>     | LS037V7DW01                       |
| <b>△</b>               | 2005.<br>04.27.                                                                   |                       | Item addition.         | Y. T.                | 画面サイズ<br>ACTIVE AREA SIZE | 93.6(3.69")<br>0.117mm 480RGBx640 |
| <b>△</b>               | 2005.<br>03.30.                                                                   |                       | Item addition.         | Y. T.                |                           |                                   |
| <b>△</b>               | 2005.<br>03.01.                                                                   |                       | Item addition.         | Y. T.                |                           |                                   |
| <b>△</b>               | 2004.<br>11.15.                                                                   | LCD-FPC 45Pin → 51Pin |                        | Y. T.                | 尺度<br>SCALE               | 1/1                               |
| <b>改訂日</b>             |                                                                                   | 改訂記事 REVISION         |                        | 担当                   | 単位<br>Unit                | mm                                |
| <b>設計<br/>DESIGNER</b> | <b>製図<br/>DRAWER</b>                                                              | <b>検図<br/>CHK CK</b>  | <b>承認<br/>ENG APPR</b> | <b>8/2-57/00株式会社</b> | <b>名称<br/>NAME</b>        | Module Outline dimension          |
| <b>高尾</b>              |  |                       |                        | [MR渡辺] 第1設計C 第5確認加   | <b>二サ-</b><br><b>USER</b> |                                   |
|                        |                                                                                   |                       |                        | SHARP CORPORATION    | 原紙サイズ A3                  | 図番<br>DRAWING NO LDM-03125E       |