

HASS 200-S Lyme open loop Hall sensor Current sensor

Model	HASS 200-S
Category	Switch Sensor
Sensor Type	Hall Effect, Open Loop
Rated Current	200 A
Measuring Range	±600 A
Accuracy	±1%
Supply Voltage	5 V
Bandwidth	DC ~ 50 kHz
Output Signal	Ratiometric, Voltage
Response Time	3 μs
Linearity	±0.5%
Operating Temperature	-40°C ~ 85°C

Note:

Invshop recommends that you inquire with the original factory or its agents about the latest production status and technical information about HASS 200-S. The product parameters displayed on Invshop are entered by Invshop engineers according to the specifications, and efforts have been made to minimize errors, but we cannot guarantee the complete correctness of the parameters. Please refer to the specification sheet!




<https://www.invshop.com>



<https://www.invshop.com>



<https://www.invshop.com>

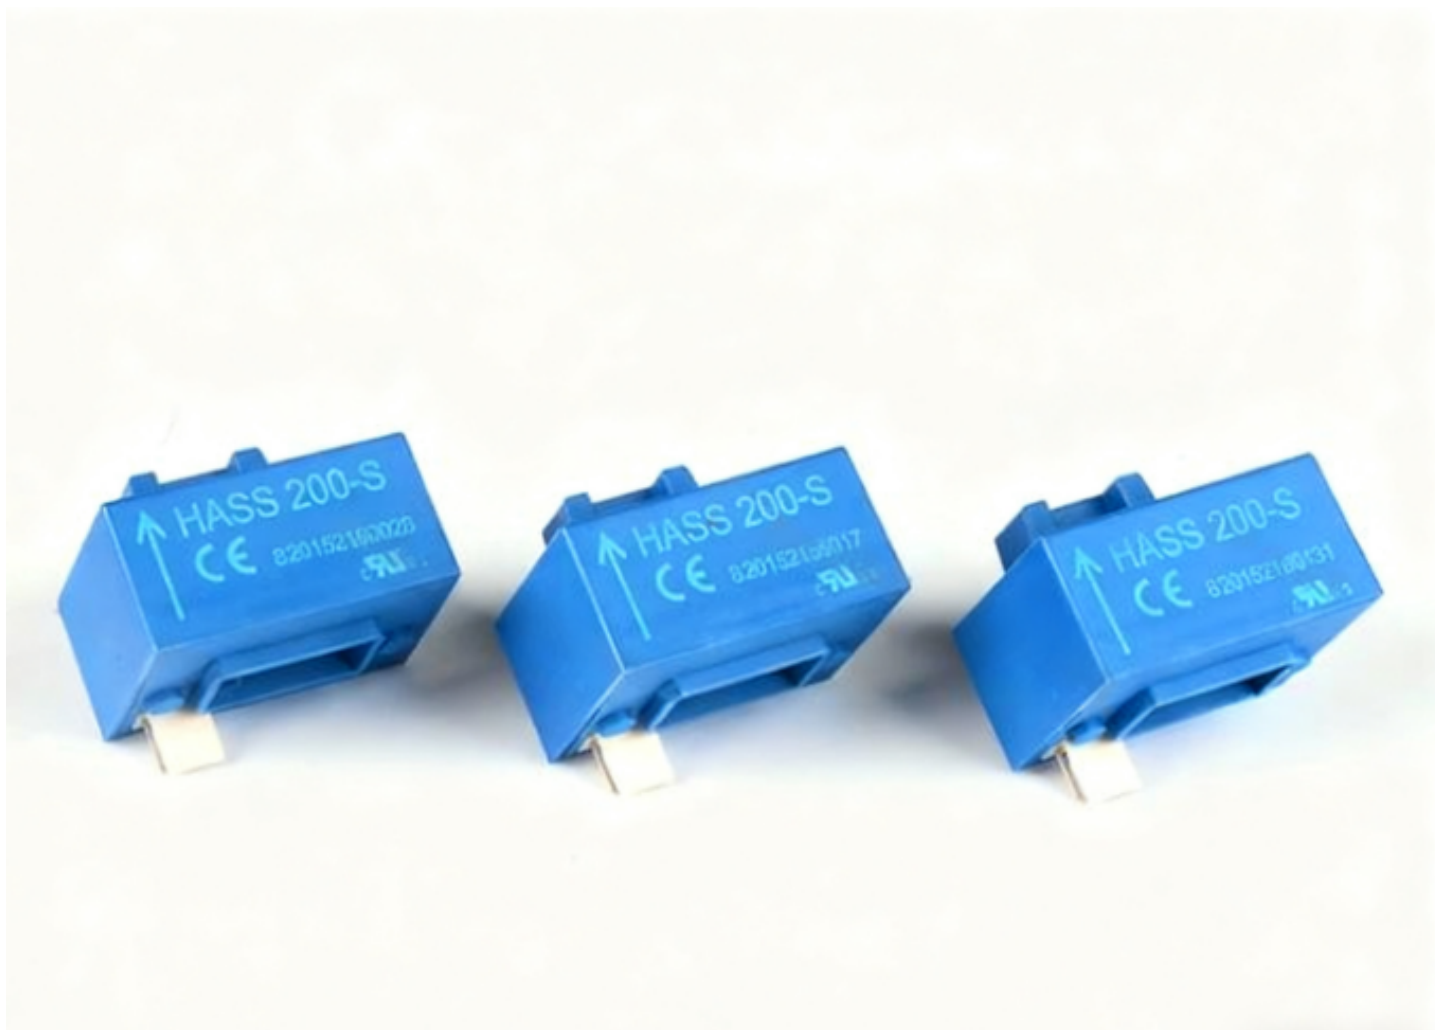

<https://www.invshop.com>